



DRAWING NO. C770RPXX	REV A	Customer Drawing	REVISION HISTORY			
			REV	DESCRIPTION (ECO)	DATE	APPROVED
			A	NEW DRW. REPLACES C770RPX, ECO 8600	05/14/19	LF

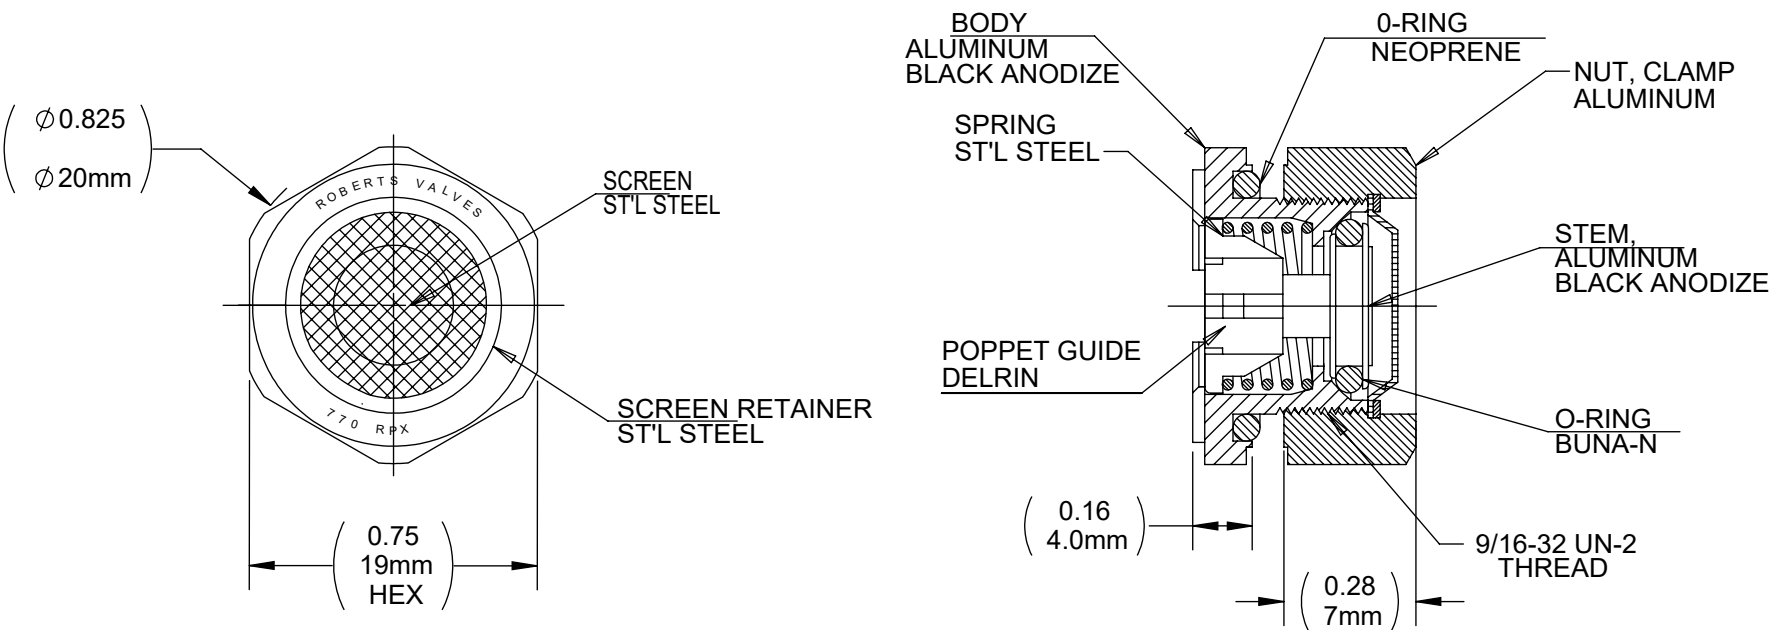

- NOTES:
- 1st SUFFIX, "X" INDICATES CRACKING PRESSURE - CRACKING PRESSURE \pm 15% OF NOMINAL, RESEAT WITHIN 20% OF NOMINAL CRACKING PRESSURE. SEE SHEET 2 FOR AVAILABLE PRESSURE RANGES.
 - 2nd SUFFIX "X" INDICATES THE USE OF THREAD LOCKER. NO SUFFIX - INDICATES NO THREAD LOCKER. G - INDICATES THREAD LOCKER ON POPPET GUIDE AND STEM.
 - CRITICAL DIMENSIONS ARE CIRCLED AND SUBJECT TO INSPECTION.
 - DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.
 - ALL DIMENSIONS ARE IN INCHES, WITH NOMINAL DIMENSION IN METRIC BELOW.
 - TEMPERATURE RANGE: -80°F TO 180°F.
 - WEIGHT - 0.23 OZ. (6.44 GRAMS).

MOLDED PARTS:
GATES, PARTING LINES, AND FLASH PER QUALITY CRITERIA

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS SOLE PROPERTY OF HALKEY-ROBERTS CORPORATION ST. PETERSBURG, FL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HALKEY-ROBERTS CORPORATION IS PROHIBITED.

DRAWN BY DMC		DATE 05/14/19		HR® Halkey-Roberts®					
APPROVED BY		DATE							
MATERIAL				TITLE PRESSURE RELIEF VALVE					
FINISH									
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 1° TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005		THIRD ANGLE PROJECTION 		SIZE A		DRAWING NO. C770RPXX		REV A	
				SCALE 2:1		DO NOT SCALE DRAWING		SHEET 1 OF 2	